

TBT 3220 Double-Lane 3-Arm Full-Height Turnstile


Main Features



Key Advantages

- Double-lane full-height access control
- Dual independent rotor mechanisms
- Designed for intensive pedestrian traffic
- Robust, impact-resistant construction
- Smooth and quiet hydraulic damping
- Bearing-supported mechanism with approx. 60% reduced friction
- Approx. 70% longer service life
- 120° controlled passage with anti-backtracking

Dimensions

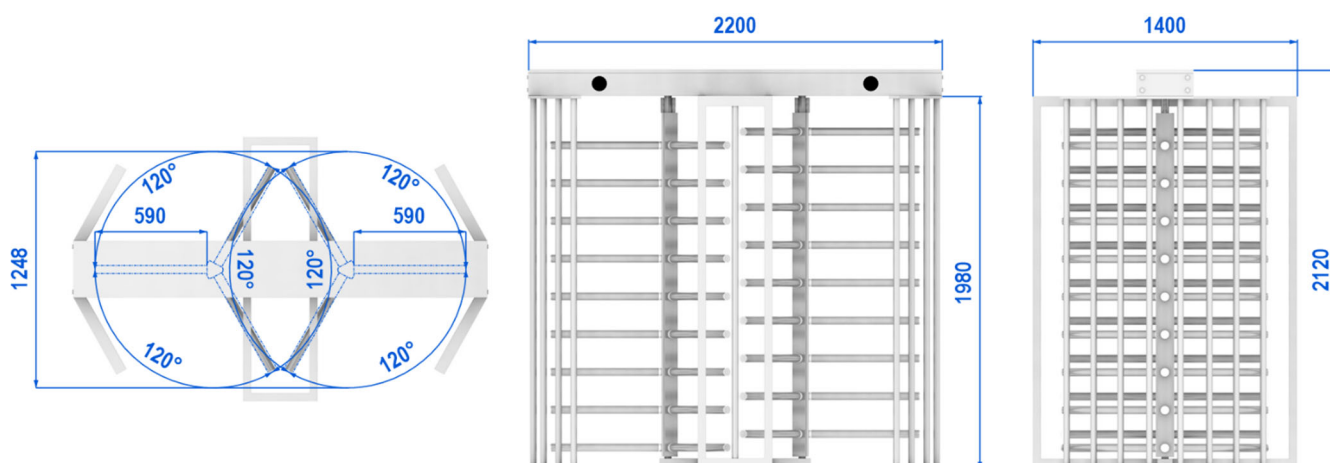

Overall Width	Overall Depth	Overall Height	Passage Width	Passage Height	Rotation Envelope
2200 mm	1400 mm	2120 mm	635–665 mm	1980 mm	1248 mm

Standard Features

Power Supply	220 VAC, 50/60 Hz (Optional: 110 VAC)
Power Consumption	10-25 W
Operating Temperature	-20°C to +50°C
Throughput	Up to 30 persons/min per lane
Protection Class	IP54
Construction Options	Powder-coated steel / AISI 304 stainless steel / mixed construction
Operation	Powder-coated steel / AISI 304 stainless steel / mixed construction: stainless steel rotors with remaining structural components powder-coated
Rotation Cycle	120° controlled rotation
Anti-Backtracking	Prevents reverse rotation after 30°
Locking System	Solenoid locking at each 120° position
Damping System	Hydraulic shock absorber
LED Indicators	Flush-mounted direction indicators
Emergency Mode	Free passage through both lanes in both directions upon power failure or activation of the emergency input
Audible Notification	Integrated buzzer
Rotor Mechanism	Dual independent bearing-supported mechanisms with concealed base bearings
Control System	Independent control of the two passage lanes
Access Control Interface	Dry contact, 12 VDC, 24 VDC
Control & Emergency Interface	DIP-switch direction control, directional dry contact output, emergency input
Environment	Indoor / Outdoor
Warranty	2 Years

Optional Features

Remote Control	External remote control
Weight Detection Platform	Weight-based passage verification with alarm / PC notification
Advanced PC Control	Centralized control of up to 256 turnstiles
Serial Communication	RS-232 / RS-422 / RS-485 PC communication
External Token Unit	Powder-coated steel or AISI 304 stainless steel floor-mounted unit, approx. 7,000-token capacity
Custom Tokens	Ø25 × 2 mm tokens with optional custom markings
Reader Integration	Card reader or fingerprint reader mounting



TBT 3220 Double-Lane 3-Arm Turnstile – Internal Mechanism

Specifications are subject to change without prior notice.